



DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
03/26/05	A	8.5 WAS 11.5, 30.0 WAS 30.5, 49.0 WAS 49.2, 16.5 WAS 16.9	T.B.	B.S.	
11/05/05	B	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
3/11/06	C	UPDATED MATERIAL SPEC.	T.B.	B.S.	
5/06/06	D	ADDED CONTACT RESI. INFO.	T.B.	B.S.	
1/12/08	E	RANGE WAS "RANGEE"	T.B.	B.S.	

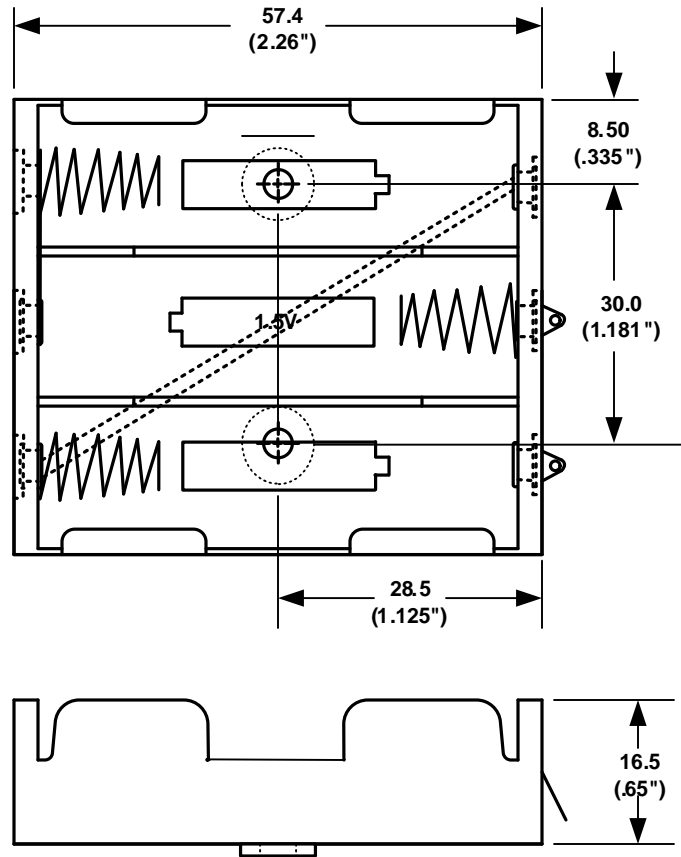

SOLDER LUGS SHOWN ABOVE

ORDERING CODE BC3AA


SOLDER LUGS = L
 (6") WIRE LEADS = W
 9 VOLT TYPE SNAPS =SF

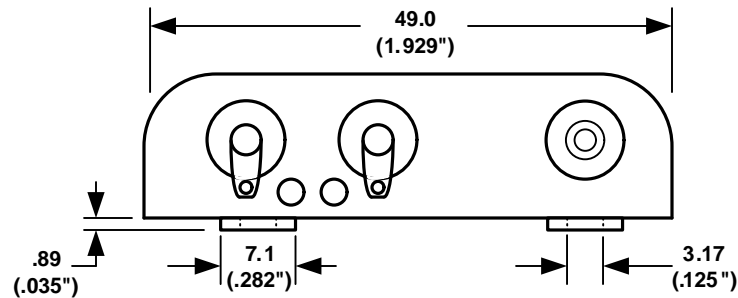

Note: Dimensions in mm. (inches)

SPECIFICATIONS :

Plastic material - polypropylene
 Flammability Rating-UL94 HB, UL File No. E216959
 Temperature Range: -10°C to +100°C
 Springs - nickel plated spring steel
 Wire - 152.4 mm Long 26 AWG, UL1007, CSA - TR-64, 300V, 80° C.
 Rivets - Brass, nickel plated
 9 Volts Snaps - Brass, nickel plated
 Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLIANT

TOLERANCES (EXCEPT AS NOTED)		 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL		SCALE	DRAWN BY S.C.
+ .5 (.020")		NONE	APPROVED BY
FRACTIONAL	TITLE	THREE "AA" CELL HOLDER	
+ .8 (.030")			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	1/12/2008	BC3AAL	