





IP65 IP67 P [III c Nus FC

Features

- Wide input range 180 ~ 528VAC
- · Constant Voltage + Constant Current mode output
- · Metal housing with Class I design
- · Built-in active PFC function
- · Class 2 power unit
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
 3 in 1 dimming (dim-to-off); Timer dimming
- · Typical lifetime>50000 hours
- 5 years warranty


Applications

- · LED street lighting
- LED high-bay lighting
- · Parking space lighting
- · LED fishing lamp
- LED greenhouse lighting

Description

HVG-65 series is a 65W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HVG-65 operates from $180 \sim 528 \text{VAC}$ and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 90%, with the fanless design, the entire series is able to operate for $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$ case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HVG-65 is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding

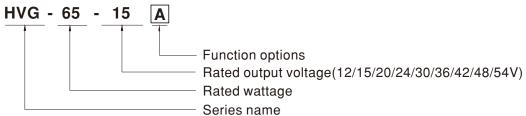

Type	IP Level	Function	Note
Α	IP65	Io and Vo adjustable through built-in potentiometer.	In Stock
В	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
AB	IP65	Io adjustable through built-in potentiometer & 3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
D	IP67	Built-in Smart timer dimming function by user request.	By request




SPECIFICATION

MODEL		HVG-65-12	HVG-65-15	HVG-65-20	HVG-65-24	HVG-65-30	HVG-65-36	HVG-65-42	HVG-65-48	HVG-65-54
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V
	CONSTANT CURRENT REGION Note.4	7.2 ~12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V
	RATED CURRENT	5A	4.3A	3.25A	2.71A	2.17A	1.81A	1.55A	1.36A	1.21A
	RATED POWER	60W	64.5W	65W	65W	65.1W	65.2W	65.1W	65.3W	65.3W
	RIPPLE & NOISE (max.) Note.2	120mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	300mVp-p	300mVp-p	300mVp-p
		Adjustable for								
	VOLTAGE ADJ. RANGE	Adjustable for A-Type only (via the built-in potentiometer) 10.8 ~ 13.5V 13.5 ~ 17V 17 ~ 22V 22 ~ 27V 27 ~ 33V 33 ~ 40V 38 ~ 46V 43 ~ 53V 49 ~ 58V								
OUTPUT		Adjustable for A/AB-Type only (via the built-in potentiometer)								
	CURRENT ADJ. RANGE	3 ~ 5A	2.58 ~ 4.3A	, ,	1.62 ~ 2.71A		1.08 ~ 1.81A	0.93 ~ 1.55A	0.81 ~ 1.36A	0.72 ~ 1.21A
	VOLTAGE TOLERANCE Note.3		±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±1.5%	±1.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME						_ 0.070	_ 0.070		
	HOLD UP TIME (Typ.)	500ms, 80ms /230VAC 400ms, 80ms /347VAC, 480VAC 16ms / 347VAC 30ms / 480VAC								
	TIOLD OF TIME (Typ.)									
	VOLTAGE RANGE Note.5	180 ~ 528VAC 254VDC ~ 747VDC (Please refer to "STATIC CHARACTERISTIC" section)								
	FREQUENCY RANGE	47 ~ 63Hz								
	POWER FACTOR (Typ.)	PF≥0.98/230	VAC, PF≧0.9	7/277VAC, PF	≥0.97/347VAC	, PF≧0.93/480	OVAC @full load	l		
	POWER FACTOR (Typ.)	(Please refer	o "POWER FA	CTOR (PF) CH	ARACTERISTI	C" section)				
INPUT	TOTAL HARMONIC DISTORTION	THD< 20%(@ load ≥ 60%/230VAC, 277VAC, 347VAC; @ load ≥ 75%/480VAC) (Please refer to "TOTAL HARMONIC DISTORTION (THD)" section)								
	EFFICIENCY (Typ.)	86.5%	87.5%	88.5%	89%	89%	89.5%	89.5%	90%	90%
	AC CURRENT (Typ.)	0.22A / 347V/		/ 480VAC	09%	0970	09.070	09.070	90 /0	90 /0
	() ()				t E00/ I \ at 4	100V/AC: Dor NI	=NAA 440			
	INRUSH CURRENT (Typ.)	COLD STAKT	Z3A(twidtn-4ZU	μs measureu a	t 50% Ipeak) at 4	FOUVAC, PEI INI	ZIVIA 4 I U			
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	12 units (circuit breaker of type B) / 20 units (circuit breaker of type C) at 480VAC								
	LEAKAGE CURRENT	<0.75mA / 480VAC								
	OVER CURRENT	95~108%								
	OVER CORRENT	Constant current limiting, recovers automatically after fault condition is removed								
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed								
PROTECTION	OVERVOLTAGE	14.4 ~ 16.8V 18 ~ 21V 23 ~ 27V 28 ~ 34V 34 ~ 38V 41 ~ 46V 47 ~ 53V 54 ~ 60V 59 ~ 65V								
	OVER VOLTAGE	Shut down o/p voltage with auto-recovery or re-power on to recovery								
	OVER TEMPERATURE	Shut down o/	p voltage, reco	overs automat	ically after tem	perature goe	s down			
	WORKING TEMP.	Tcase=-40 ~ +80°C (Please refer to "OUTPUT LOAD vs TEMPERATURE" section)								
	MAX. CASE TEMP.	Tcase=+80°C								
	WORKING HUMIDITY	20 ~ 95% RH non-condensing								
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 60°C)							
	VIBRATION			le period for 3	72min. each ald	nna X Y Z axe	ς			
	SAFETY STANDARDS									
SAFETY &	WITHSTAND VOLTAGE	UL8750, CSA C22.2 No. 250.0-13, EAC TP TC 004, IP65 or IP67 approved I/P-O/P:3.75KVAC								
	ISOLATION RESISTANCE									
EMC		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH Compliance to EN55015, EN61000-3-2 Class C (@ load≧60%) ; EN61000-3-3, FCC Part 15 Subpart B, EAC TP TC 020								
	EMC EMISSION							•		
	MTBF								ine-Line 2KV), I	AC IP IC 02
OTHERS		612.6K hrs m		a or-332 (Del	llcore) ; 208K h	IIS IIIIII. IVIII	-HDBK-217F	(25 C)		
	DIMENSION		, ,	NIET						
NOTE	PACKING 0.77Kg; 18pcs/14.9Kg/0.89CUFT 1. All parameters NOT specially mentioned are measured at 347VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Please refer to "DRIVING METHODS OF LED MODULE". 5. Please refer to "STATIC CHARACTERISTIC" sections for details. 6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. 7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 8. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (c) point (or TMP, per DLC), is about 75°C or less. 9. Please refer to the warranty statement on MEAN WELL's website at http://www.meanwell.com 10. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).									




■ Block Diagram

PFC fosc : 65KHz PWM fosc : 65KHz

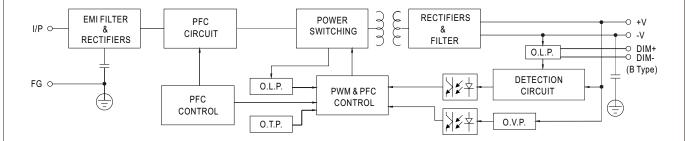

■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

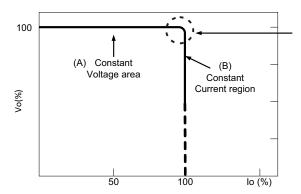


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.




■ DIMMING OPERATION




imes 3 in 1 dimming function (for B/AB-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM: 0 ~ 10VDC, or 10V PWM signal or resistance.
- · Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 0 ~ 10VDC

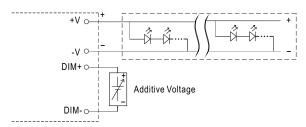


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

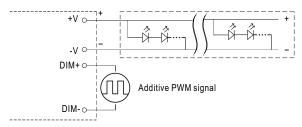



"DO NOT connect "DIM- to -V"


O Applying additive resistance:

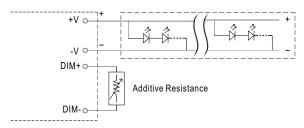

"DO NOT connect "DIM- to -V"








Note: 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.


2. The output current could drop down to 0% when dimming input is about 0k Ω or 0Vdc, or 10V PWM signal with 0% duty cycle.



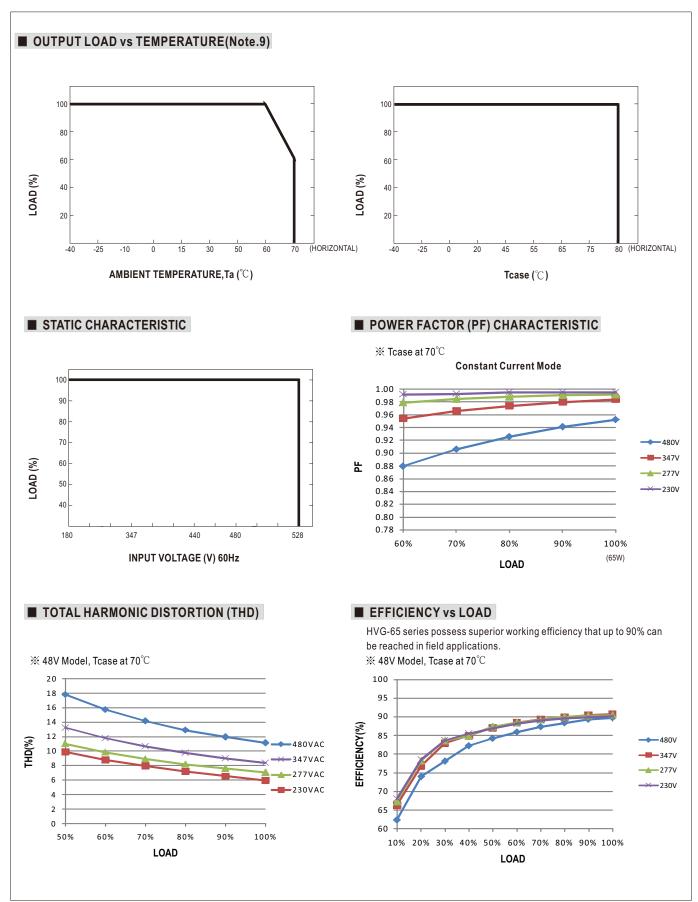





■ LIFE **TIME**

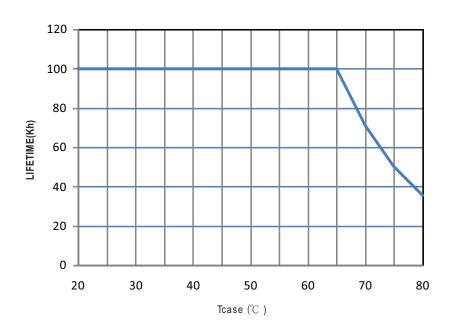



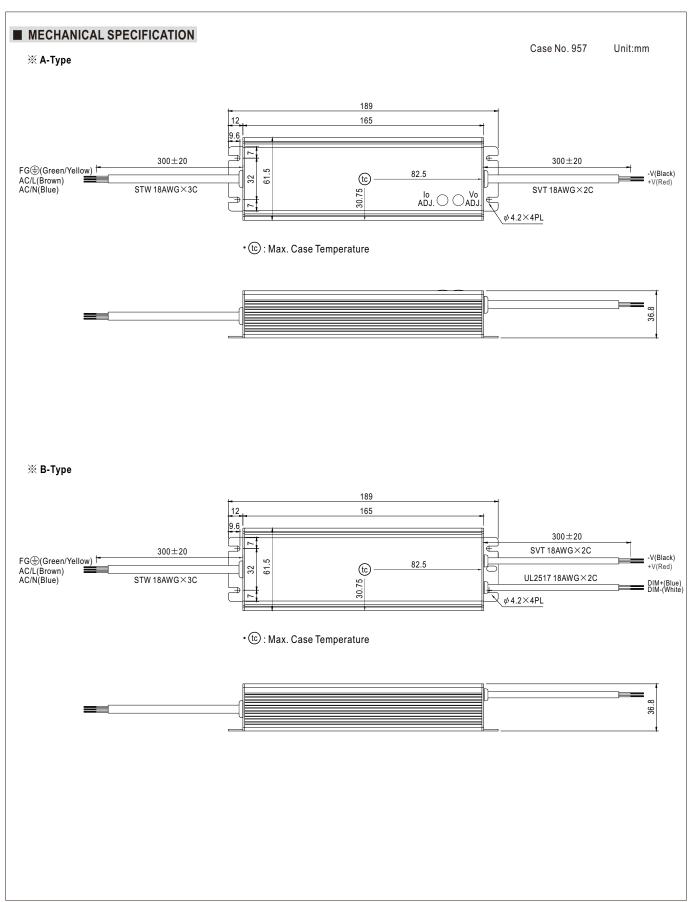



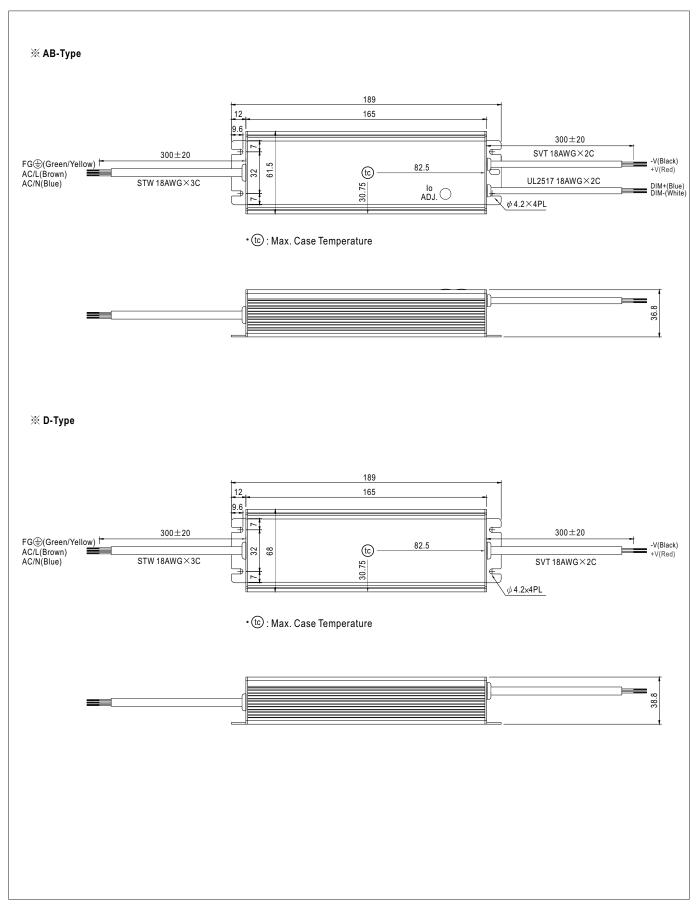




■ WATERPROOF CONNECTION


X Waterproof connector

Waterproof connector can be assembled on the output cable of HVG-65 to operate in dry/wet/damp or outdoor environment.




Size	Pin Configuration (Female)			
M12	000	000		
IVITZ	4-PIN	5-PIN		
	5A/PIN	5A/PIN		
Order No.	M12-04	M12-05		
Suitable Current	10A max.	10A max.		

Size	Pin Configuration (Female)		
M15	(o)		
INITO	2-PIN		
	12A/PIN		
Order No.	M15-02		
Suitable Current	12A max.		



※ Cable Joiner

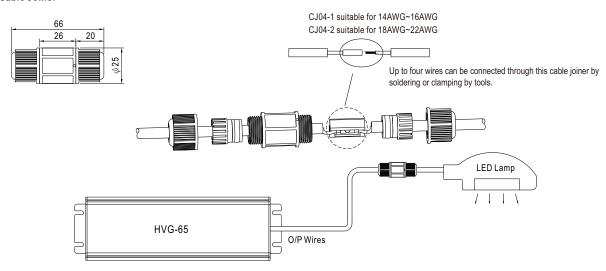

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html